





MOSQUITO-REPELLING LED STRIP LIGHT

SC-2835-01-JT1005W-WW-5-120-8-IP65

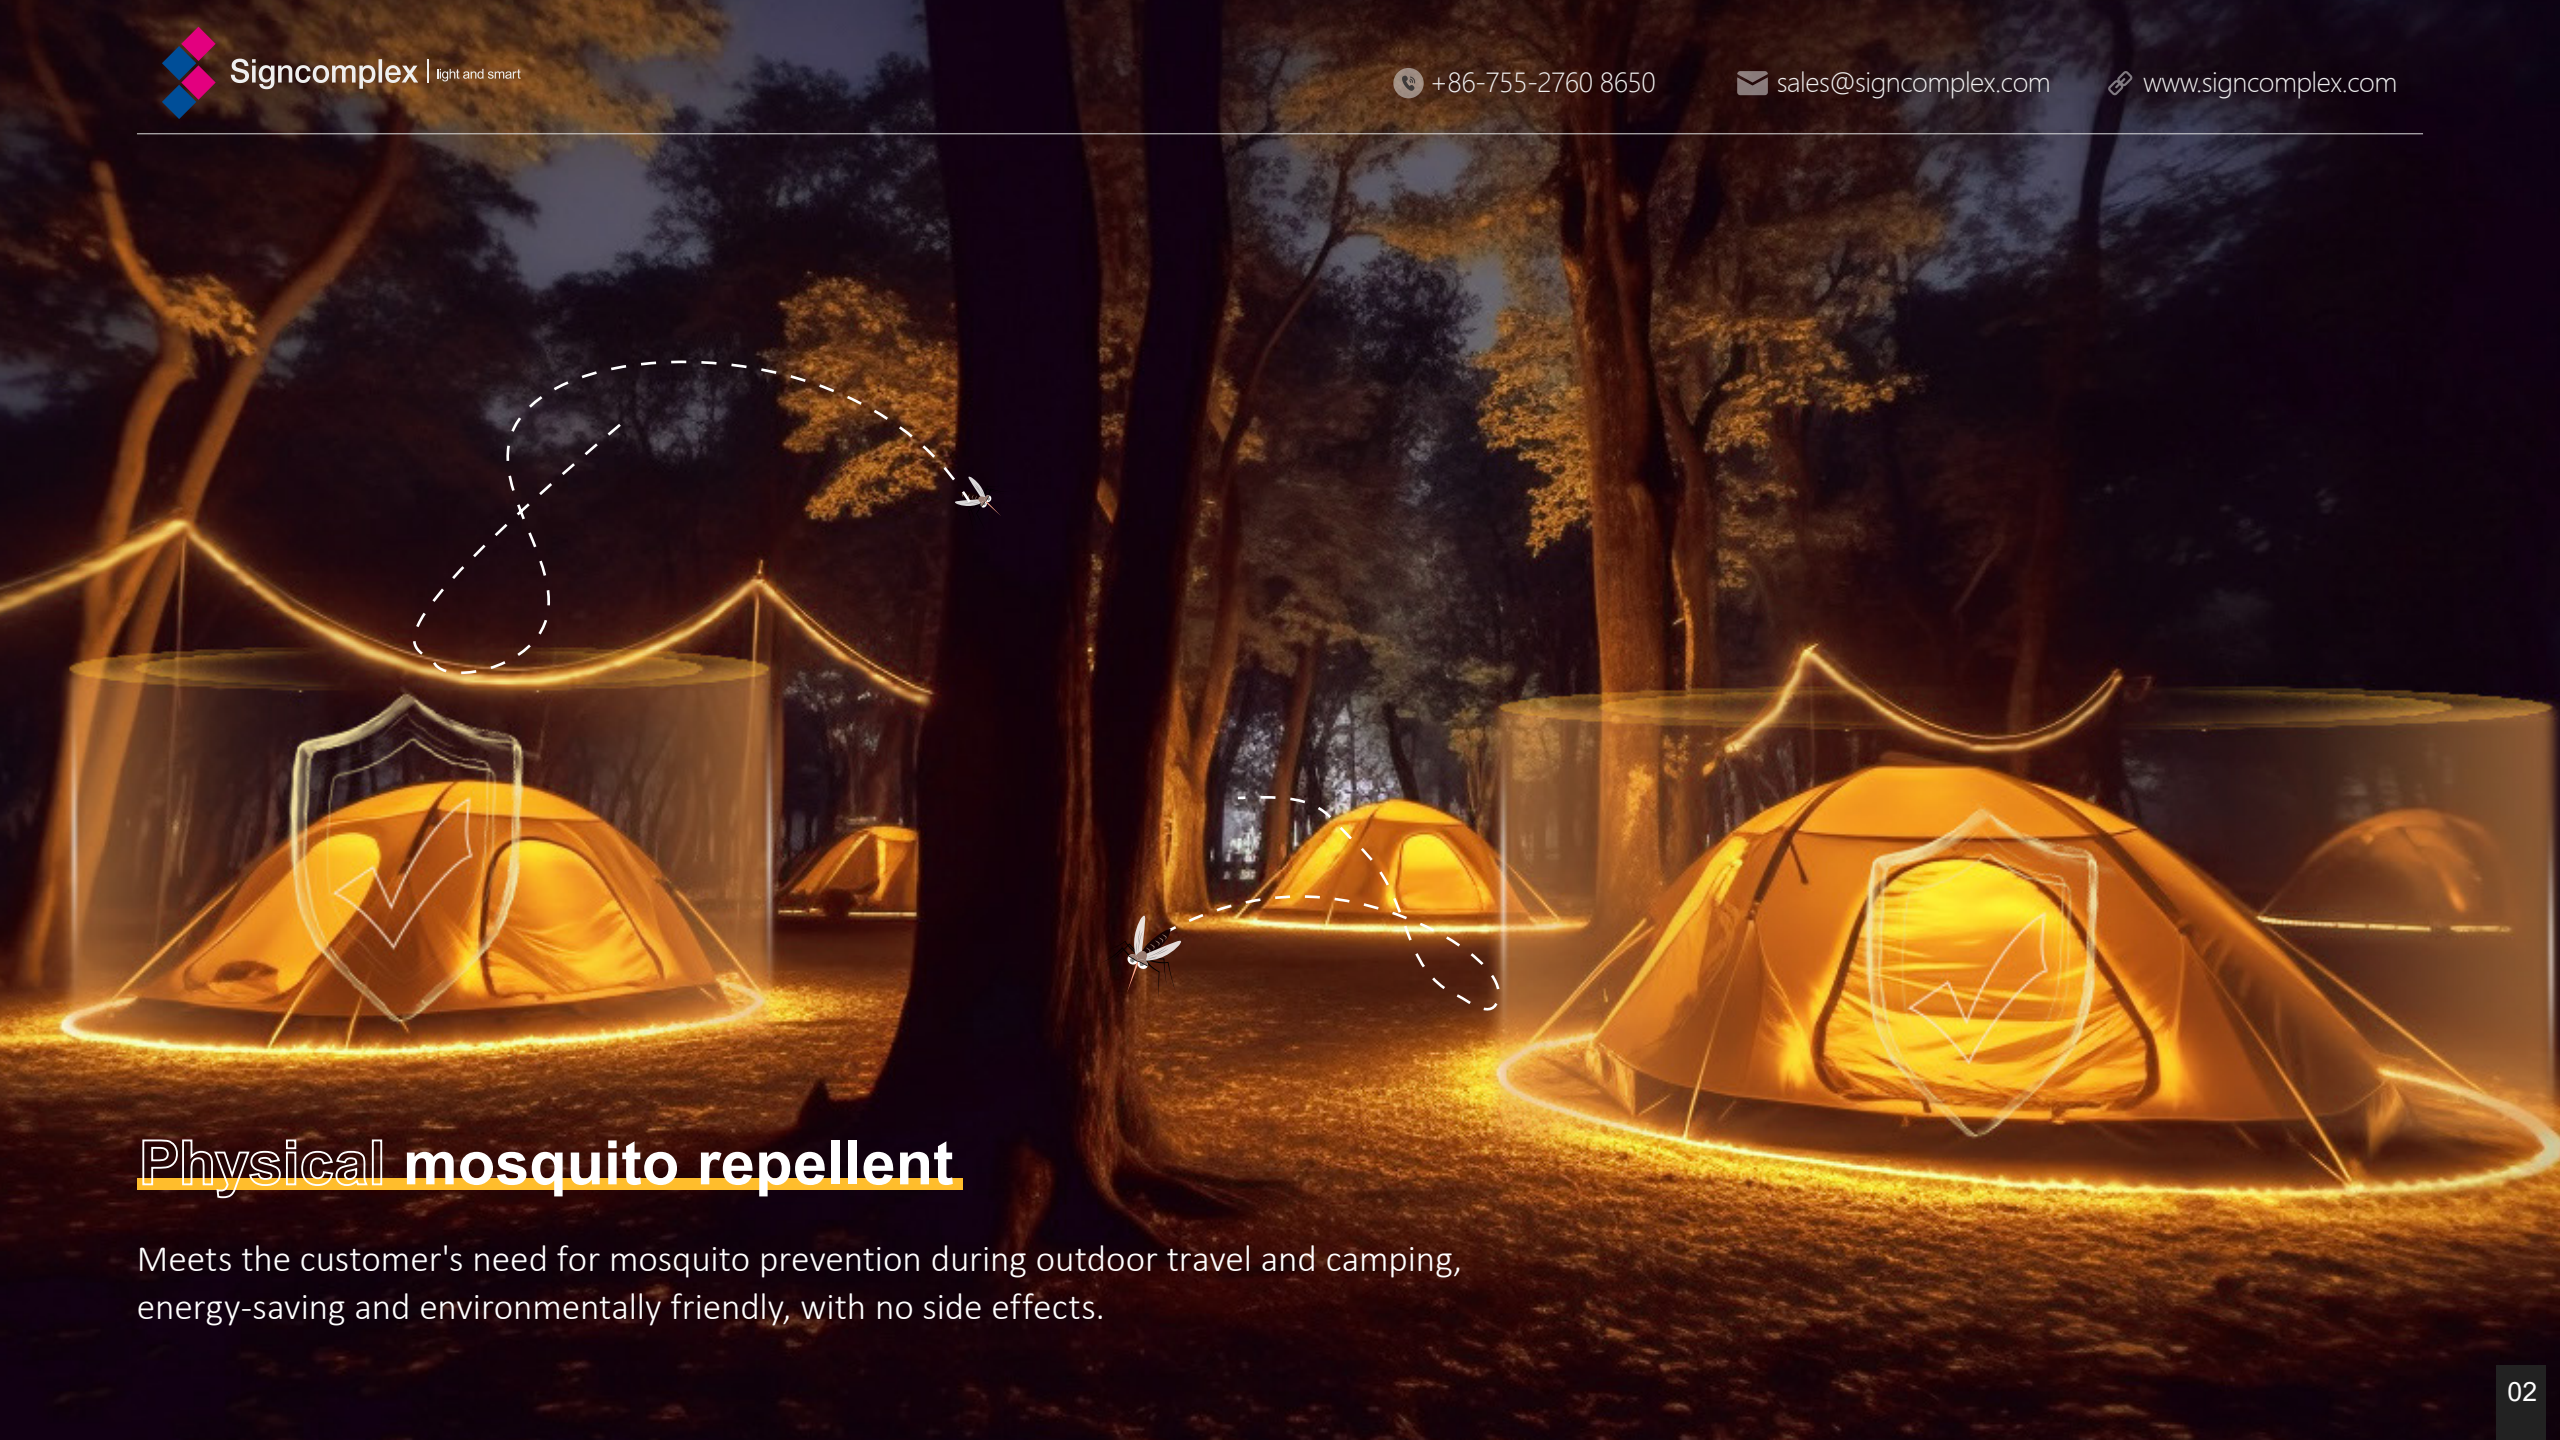


Physical mosquito repellent

Meets the customer's need for mosquito prevention during outdoor travel and camping, energy-saving and environmentally friendly, with no side effects.

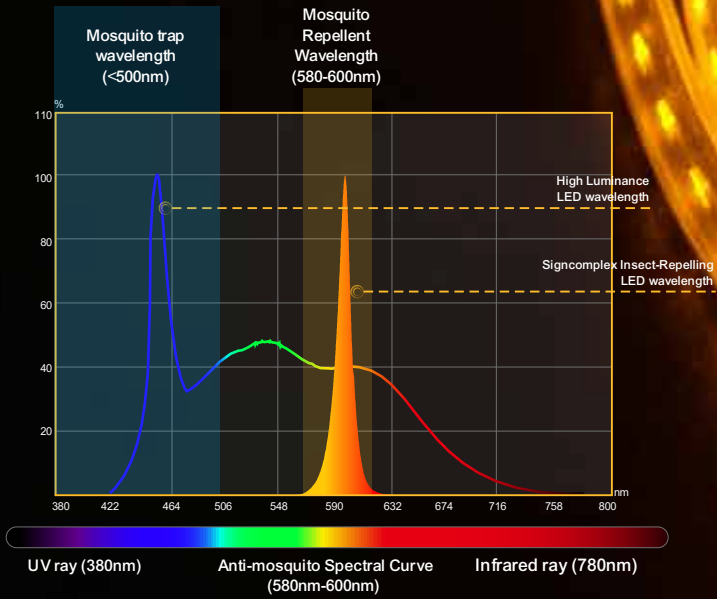

Effective mosquito repellent

It uses a special light source to attract mosquitoes and effectively repel them.

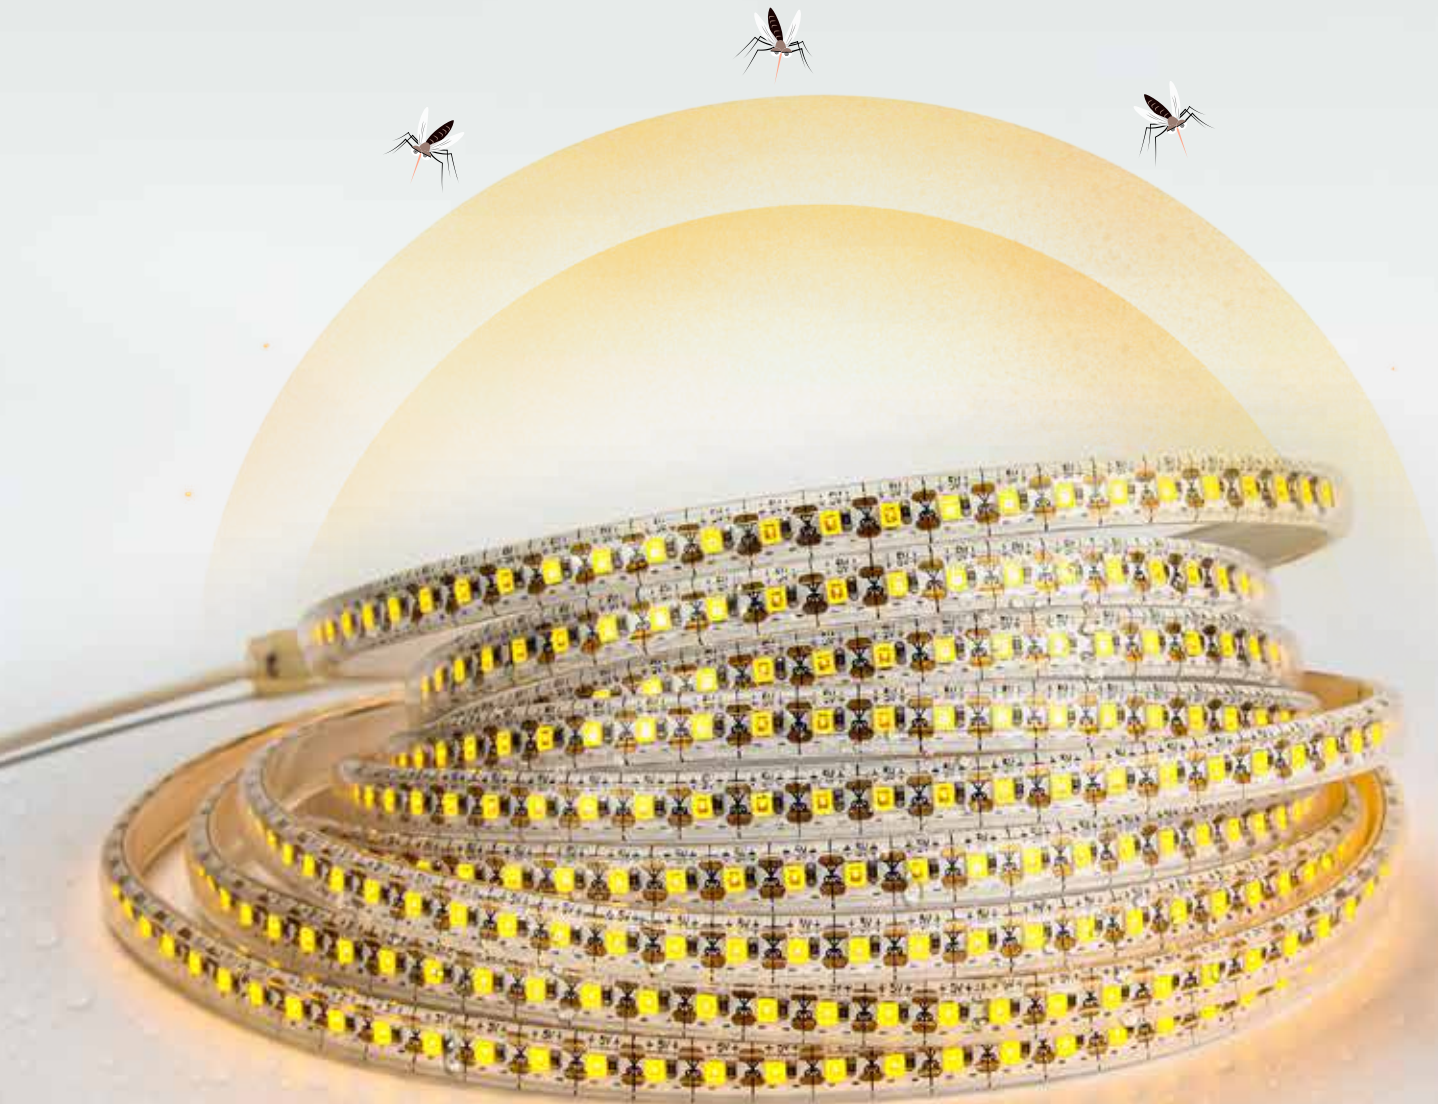

IP65 WATERPROOF

Suitable for outdoor use and can be used without worry even in the rain.

PORTABLE & EASY TO USE




Small in size and easy to carry. It can be placed on camping tables or at tent entrances for convenience.



PARAMETER


Model	Wave Length & CCT Range (for LED only)		LED Type	LED Qty. (PCS/M)	Rated Watt (w/m)	DC Voltage (V)	Max. Length (M)	Min. Length (mm)	PCB Width	IP	Beam angle (degree)
SC-2835-01- JT1005W-WW -5-120-8-IP65	WW	590-595nm	2835	120	5	5	5	8.3	8	65	116.5

DIMENSIONS (unit: mm/inch)

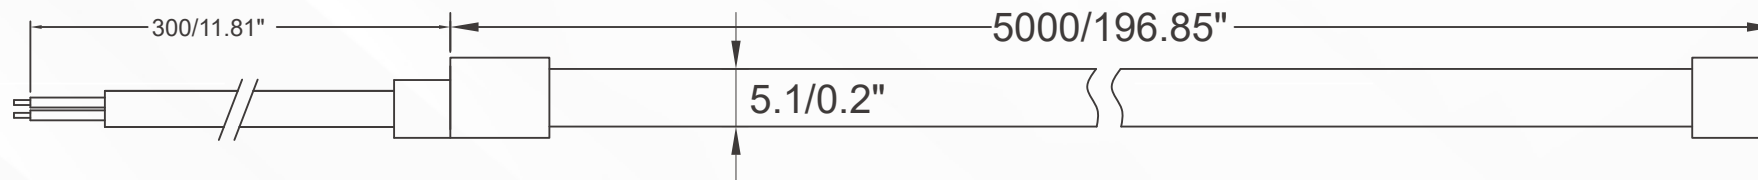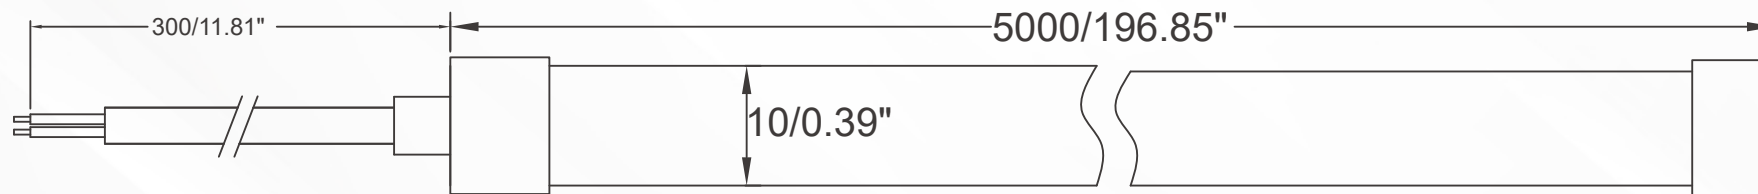


ACCESSORIES

Mounting clip



20pcs/m


3M tape




Optional

OPTIONAL SPECIFICATION KIT

**DC
TYPE**

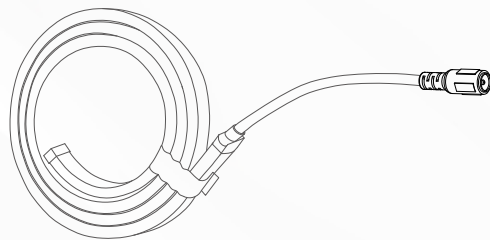

**USB
TYPE**

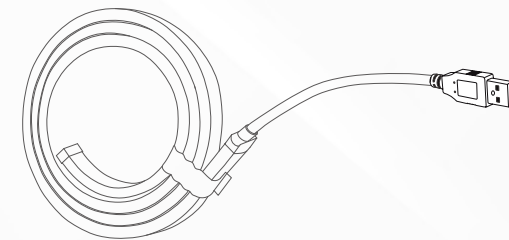

INSTALLATION OPERATION

1. Cut along the cutting line with scissors, as shown in Figure 1.

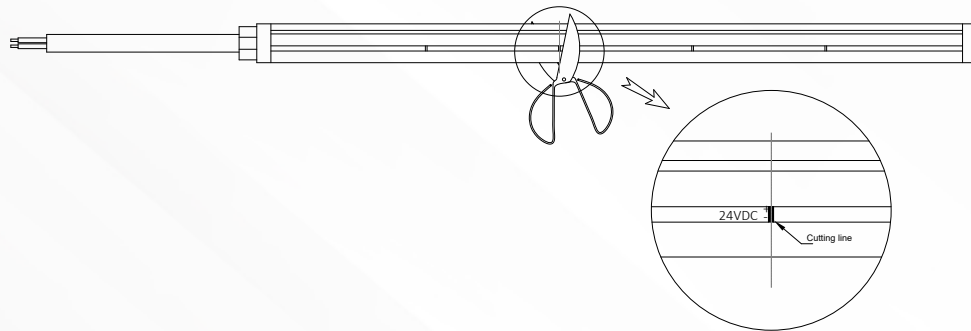


Figure 1

2. The plug will be filled with glue, and put the neon flex into the plug, the installation is complete, as shown in Figure 2.

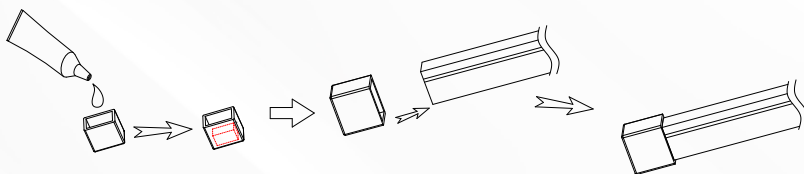


Figure 2

3. Cut off the adhesive on the back of the PCB to reveal the welding points, as shown in Figure 3.

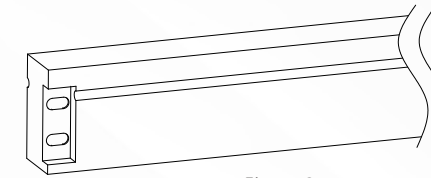


Figure 3

4. Use the soldering iron to solder the wire, as shown in Figure 4.

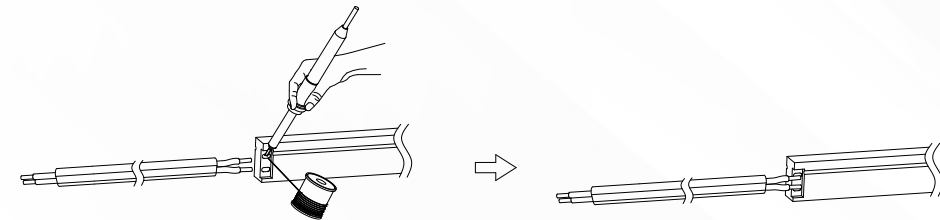


Figure 4

5. Fill the plug with glue, and repeat Figure 2 gluing steps, and then insert the neon flex into the plug, installation completed, as shown in Figure 5.









Figure 5

BENDING DIRECTION AND BENDING RADIUS

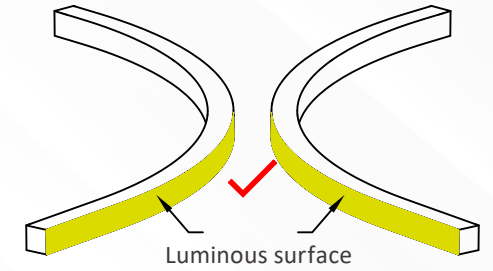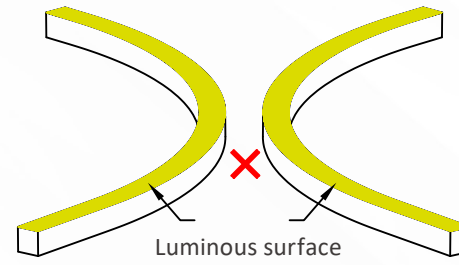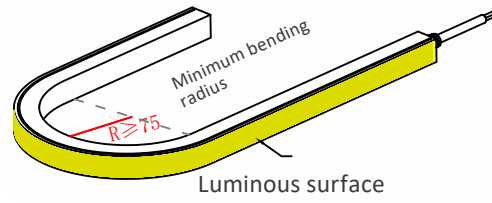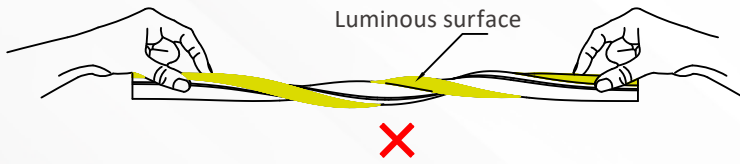

PACKAGING INFORMATION

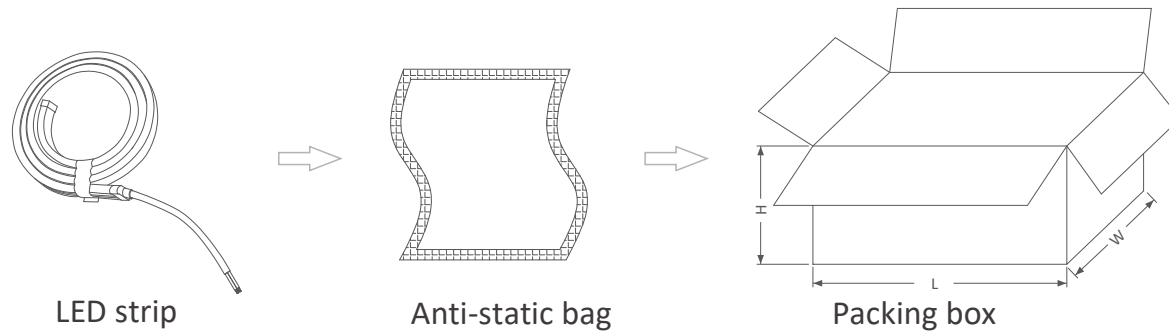

LED strip+accessories	Anti-static bag		Packing Box	
Part Number	Gross Weight per Reel	QTY per Carton	Gross Weight	Size(cm/inch)
SC-2835-01- JT1005W-WW- 5-120-8-IP65	1KG	20	20KG	59cm*32.5cm*21.1cm 23.23"*12.79"*8.31"

INSTALLATION REQUIREMENT



- ⦿ The LED strip and accessories can't be squeezed or folded.
- ⦿ PCB conductive parts can't be damaged during installation.
- ⦿ Installation must conform to electrical safety standard. The LED strip can only be installed by professionals.
- ⦿ Ensure power supply transform operating load with transformer.
- ⦿ When install on metal or conductor surface, insulation protection need to be provided to the contact area.
- ⦿ Observe positive and negative polarity, ensure correct connection to avoid damaging LED strip.
- ⦿ During installation, please prevent static electricity.
- ⦿ The product need anti-corrosion environment, such as, avoiding damp, water drop or other adverse elements.