

# 5225 High brightness 2-in-1 Hybrid LED strip

SC-YID3-W+WW-12/24



Available colors



## Features


- 5225 2-in-1 Hybrid LED
- CRI80 & CRI90 are both available
- High brightness and tunable, reach 2650lm/M Max.
- CCT changeable:2800K-6500K
- 60LED/M, 12V/24V DC
- 28.8W/M Max., should work with aluminum heat sink
- Max length: 3M for 12V & 5M for 24V
- IP20&IP64(slim silicon glue potted)
- CE, RoHS, 5 years warranty

## Technical Parameters


Model	Color	CCT	Lumen (lm/M)	LED Type	CRI	LED Qty. (PCS/M)	Power (W/M)	Beam angle (degree)	Width (mm)	Max. Length (M)	Min. Length (mm)	DC Voltage (V)
SC-YID3-W+WW-12	W	5500K-6000K	1366	5225	80	60	14.4	120	10	3	50	12
	WW	2800K-3200K	1289				14.4					
	W+WW	3800K-4500K	2653				28.8					
SC-YID3-W+WW-24	W	5500K-6000K	1366	5225	80	60	14.4	120	10	5	100	24
	WW	2800K-3200K	1289				14.4					
	W+WW	3800K-4500K	2653				28.8					

## Dimensions


### SC-YID3-12V

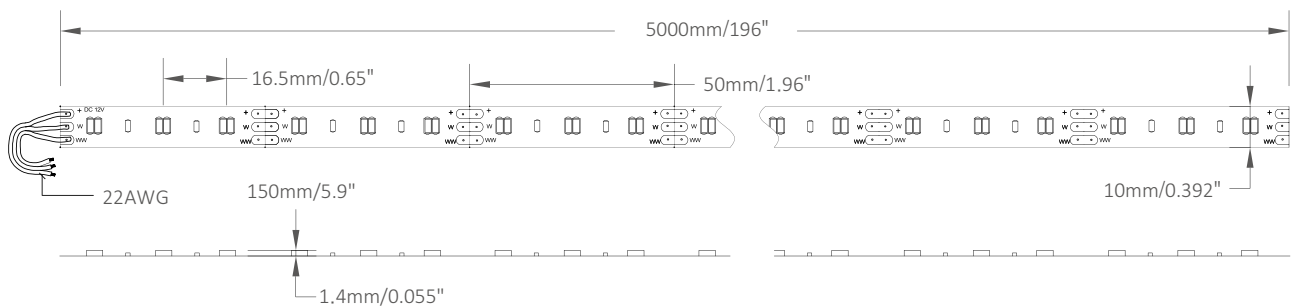

### SC-YID3-24V

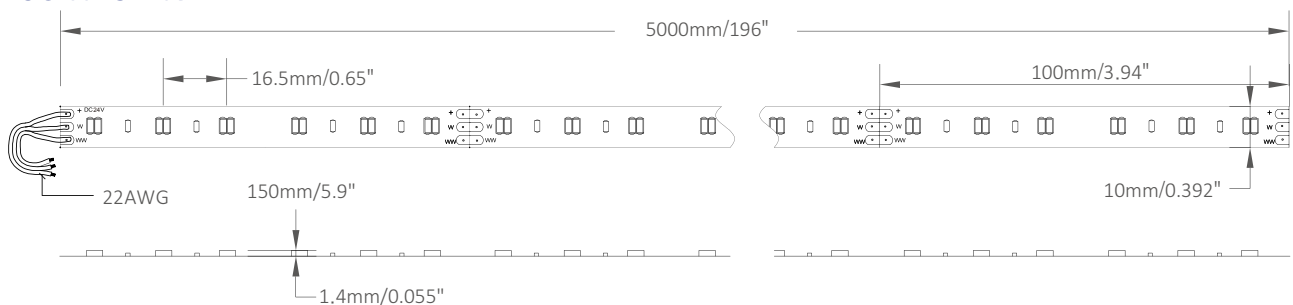

## Packaging information

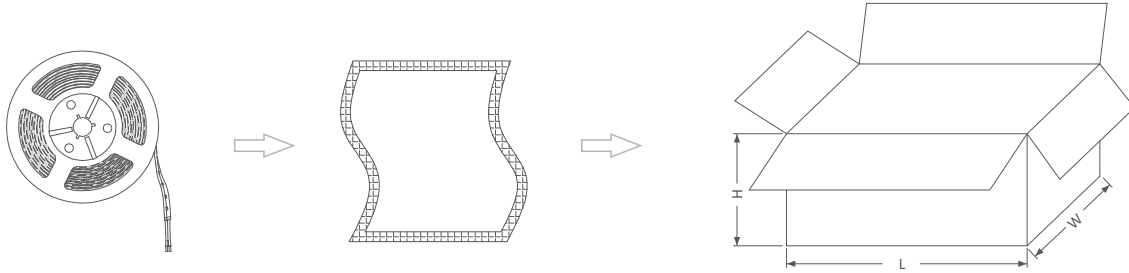

LED strip+accessories	Anti-static bag	Packing Box		
Part Number	Gross Weight per Reel	QTY per Carton	Size(cm/inch)	Gross Weight
SC-YID3-W+WW-12/24	0.15Kg	50 Reels	61cm*35cm*24cm 2.4"*1.38"*0.94"	8.0Kg

## Installation Requirement

- Installed on flame-retardant surface, wood and material exceed 2mm thickness;
- Please first read the product specification carefully, make sure the using environment conform to specification, then it can be used;
- Confirm input voltage and power off before use;
- Series connection can't exceed 3m for 12V and 5m for 24V, and the strip must be used with aluminum profile and other radiators;
- Cut the strip according to the cutting logo on the strip.

## Application

- The product can be used in advertising billboard, backlit decoration, architecture, bar, dance hall, wine cabinet, floor, ceiling, etc.



Yijia Industrial Park, Fuqian Road, Guanlan Town, Longhua, Shenzhen, Guangdong, China

Tel:+86-755-27608650  
 Fax:+86-755-27608651  
[www.signcomplex.com](http://www.signcomplex.com)  
[sales@signcomplex.com](mailto:sales@signcomplex.com)