

MOSQUITO-REPELLING &

AMBIENCE LIGHTING

LED STRIP LIGHT





SC-(2835+5050)-TT1515W-(WW+RGB)-5-120-10-IP67




Mosquito repellent &

ambient lighting

A silicone sleeved LED strip that emits two types of light, up and down light, left and right light, and emits different lights simultaneously in two directions

Ambient lighting

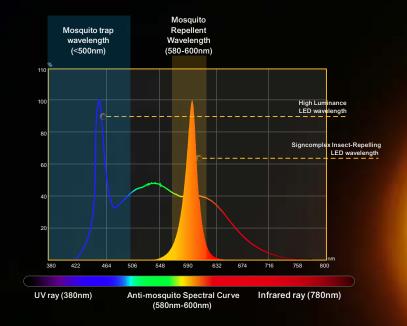



RGB & MAGIC EFFECTS

SMD5050 external IC LED, multiple color variations, static and dynamic ambient lighting effects.


Effective mosquito repellent

It uses a special light source to attract mosquitoes and effectively repel them.

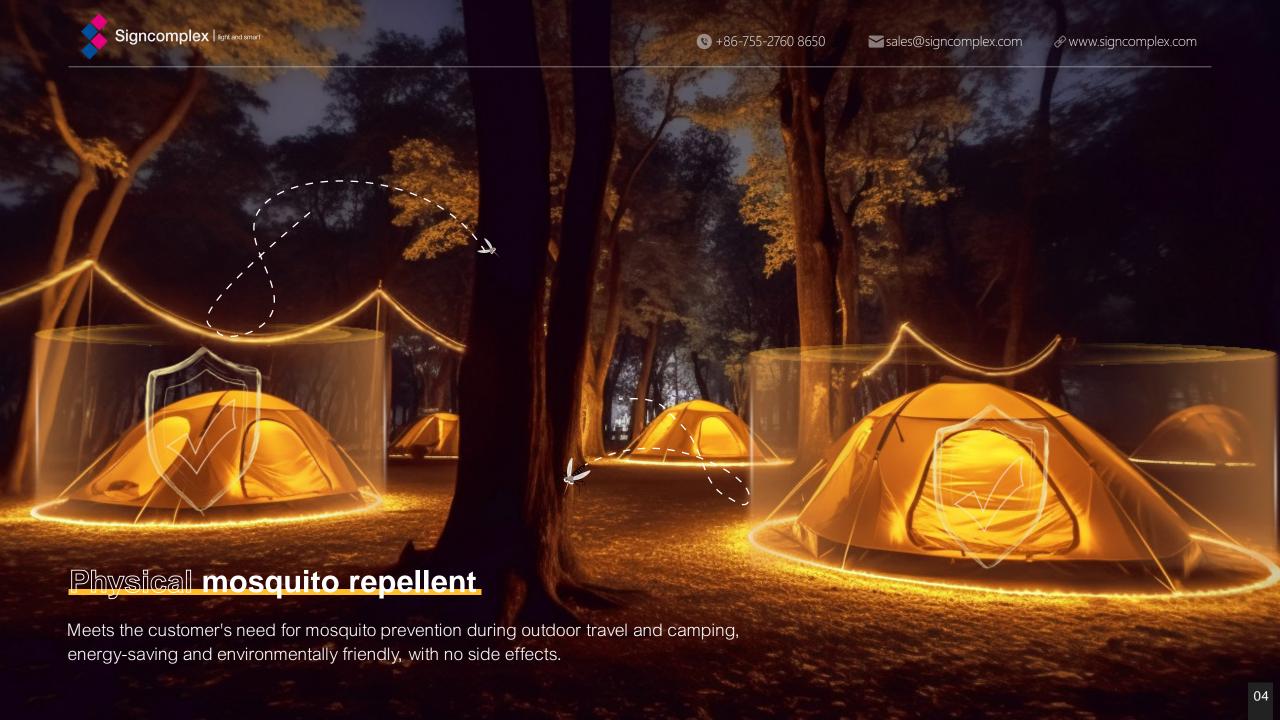

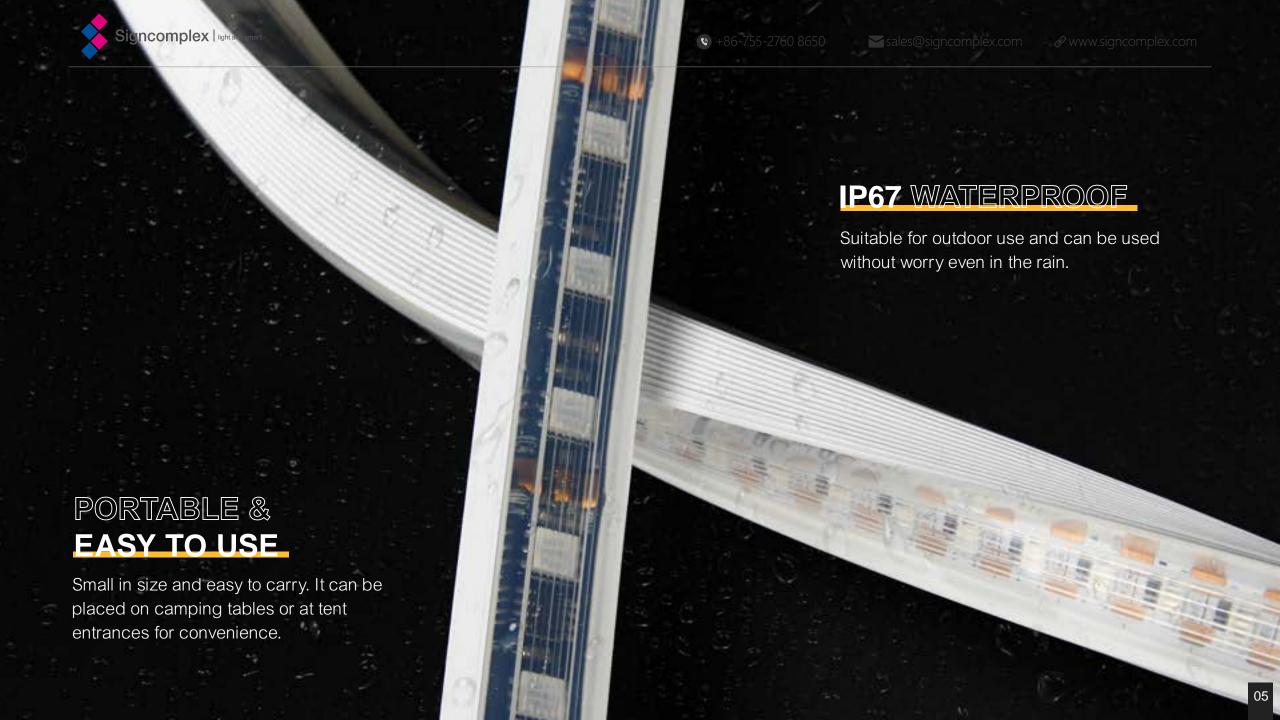



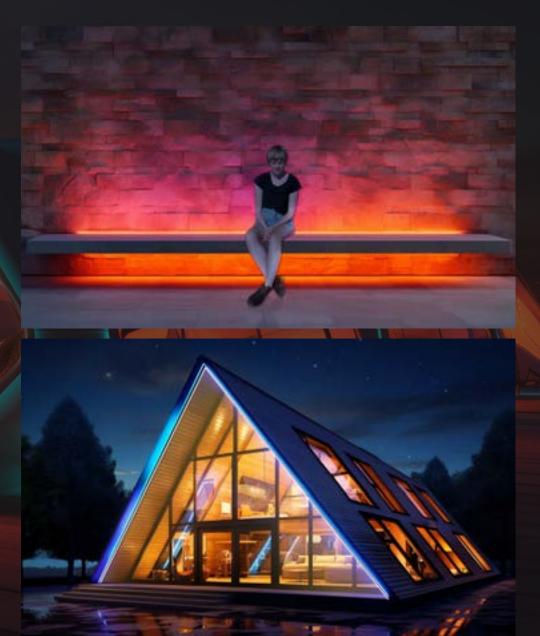


PARAMETER

Model	Wave Length & CCT Range (for LED only)		LED Type	LED Qty. (PCS/M)	Rated Watt (w/m)	DC Voltage (V)	Max. Length (M)	Min. Length (mm)	PCB Width	IP	Beam angle (degree)
SC-(2835+5050)- TT1515W- (WW+RGB) -5-120-10-IP67	WW	590nm	2835			5	5	8.33	10	67	2*110
	R	620-630nm		120	5						
	G	515-530nm									
	В	460-470nm	5050	60				50			

ACCESSORIES

Item	Endcap with hole	Endcap without hole	Suspension hook	Collar loop
Picture				
Qty.	2pcs/ 5M	2pcs/5M	20pcs/5M	20pcs/5M

DIMENSIONS (unit: mm/inch)

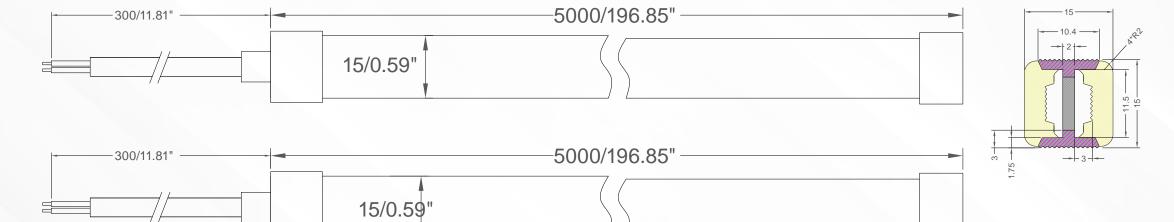





INSTALLATION OPERATION

Step 1: Pull a parallel line at the location where the light strip is ready to be installed, as shown in Figure 1:

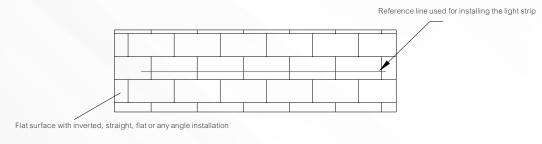


Figure 1

Step 2: Fix the fixed clip base on the reference line, as shown in Figure 2:



Figure 2

Step 3: Install the light strip into the PC clip, as shown in Figure 3:

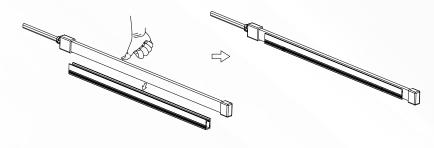


Figure 3

Step 4: Install the light strip into the fixed clip and complete the installation, as shown in Figure 4:



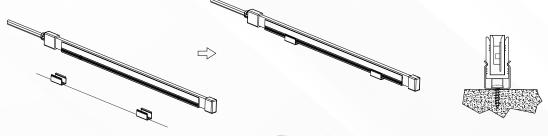


Figure 4

BENDING DIRECTION AND BENDING RADIUS

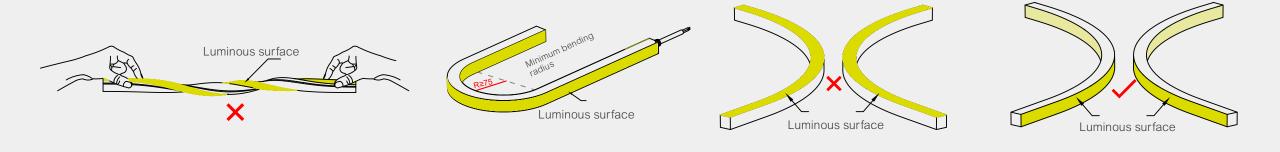

PACKAGING INFORMATION

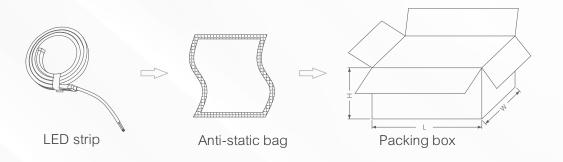

LED strip+accessories	Anti-static bag		Packing Box		
Part Number	Gross Weight per Reel	QTY per Carton	Gross Weight	Size(cm/inch)	
SC-(2835+5050)- TT1515W-(WW+RGB) -5-120-10-IP67	1.35KG	15	20.25KG	33cm*33cm*42.5cm 12.99"*12.99"*16.73"	