



S-TYPE



ARBITRARY BENDING

LED STRIP LIGHT




Available colors



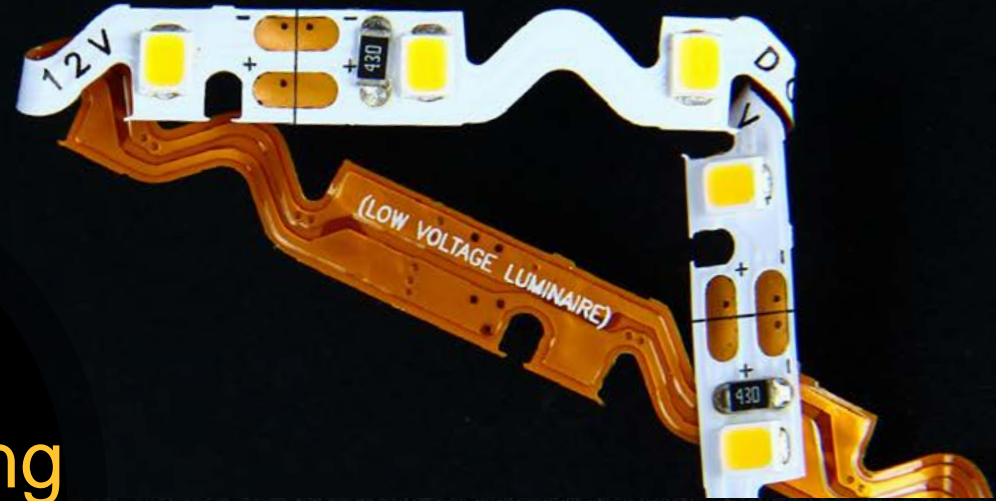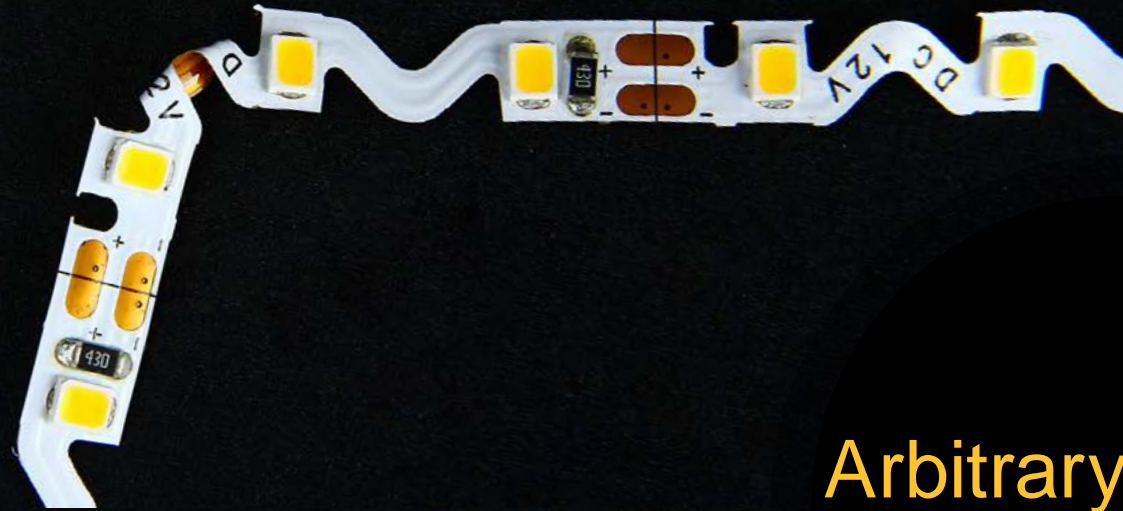

Arbitrary bending

S-type soft light strip, arbitrary bending to meet your needs for irregular spaces

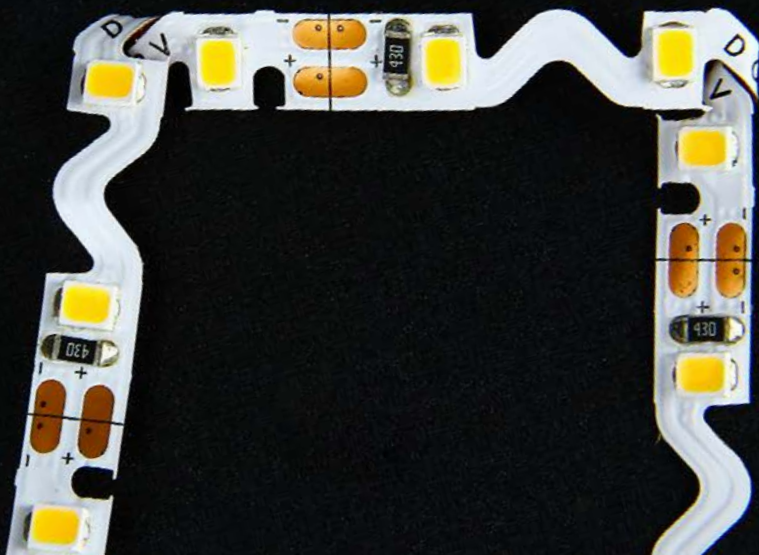

Better display of luminous characters





Optional

Various combinations of 60-120 LEDs available

PCB

6mm or 8mm width PCB

Voltage

12V or 24V DC



SMD2835 high brightness LEDs, high CRI,
low light attenuation



Application


- ◉ Suitable for a wide range of applications including lightboxes, shop windows, billboards, display boards, etc.
- ◉ Widely used in hotels, shopping malls, furniture, cabinets, shelf, as decoration lighting, direct lighting or indirect lighting

TECHNICAL PARAMETERS


Model	CCT	Lumen (lm/m)	LED Qty. (LEDs/m)	LED Type	Rated watt (W/m)	CRI	Cutting Points (mm)	Beam angle (°)	Compatible Dimming Methods	IP	Ambient Temp	
SC-2835-03-SXX-XX-12-60-6-5M SC-2835-06-SXX-XX-24-60-6-5M		1200	60	2835	14.4	80/90	50 100	120	PWM/ 0-10V/ 1-10V/ DALI/DMX	IP20	-20°C to 45°C	
SC-2835-03-SXX-XX-12-60-8-5M SC-2835-06-SXX-XX-24-60-8-5M		2400K 2700K 3000K 3500K	1200	60	2835	14.4	80/90	50 100	120	PWM/ 0-10V/ 1-10V/ DALI/DMX	IP20	-20°C to 45°C
SC-2835-03-SXX-XX-12-72-6-5M SC-2835-06-SXX-XX-24-72-6-5M		4000K 5000K 6000K 6500K	1350	72	2835	14.4	80/90	41.67 83.3	120	PWM/ 0-10V/ 1-10V/ DALI/DMX	IP20	-20°C to 45°C
SC-2835-03-SXX-XX-12-120-6-5M SC-2835-06-SXX-XX-24-120-6-5M			1500	120	2835	14.4	80/90	25 50	120	PWM/ 0-10V/ 1-10V/ DALI/DMX	IP20	-20°C to 45°C

DIMENSIONS (unit: mm/inch)


SC-2835-03-SXX-XX-12-60-6-5M




SC-2835-06-SXX-XX-24-60-6-5M




SC-2835-03-SXX-XX-12-60-8-5M




SC-2835-06-SXX-XX-24-60-8-5M




SC-2835-03-SXX-XX-12-72-6-5M




SC-2835-06-SXX-XX-24-72-6-5M




SC-2835-03-SXX-XX-12-120-6-5M




SC-2835-06-SXX-XX-24-120-6-5M




PACKAGING INFORMATION



LED Strip light

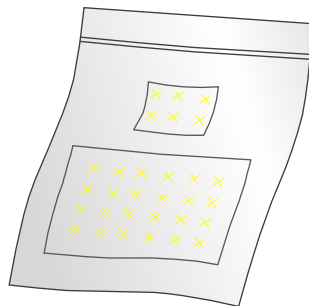

Anti-static bag

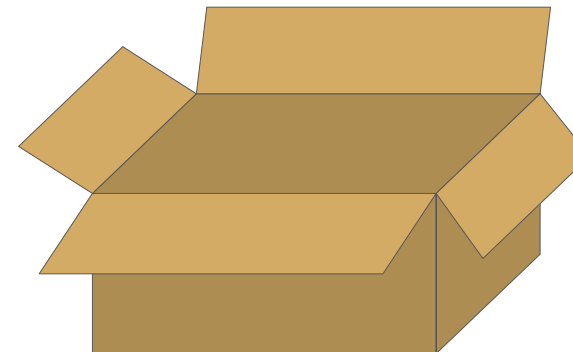

Packing box

Model	Reel size	M/roll	Carton packing Qty	Carton size
SC-2835-03-SXX-XX-12-60-6-5M/SC-2835-06-SXX-XX-24-60-6-5M	5000*6mm	5	50	590*325*211mm
SC-2835-03-SXX-XX-12-60-8-5M/SC-2835-06-SXX-XX-24-60-8-5M	5000*8mm	5	50	590*325*211mm
SC-2835-03-SXX-XX-12-72-6-5M/SC-2835-06-SXX-XX-24-72-6-5M	5000*6mm	5	50	590*325*211mm
SC-2835-03-SXX-XX-12-120-6-5M/SC-2835-06-SXX-XX-24-120-6-5M	5000*6mm	5	50	590*325*211mm